

The wise choice



Micro-Tronics

for all your filter needs


Micro-Tronics is an operating division of O.M. Jones, Inc.

Telephone: 209-532-1008

Facsimile: 209-532-1009

e-mail: sales@micro-tronics.net

-Model BPM50602

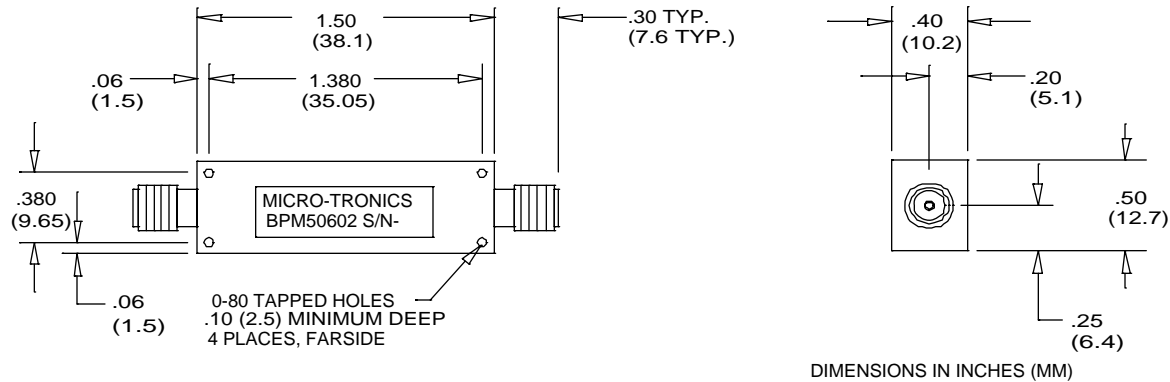

Micro-Tronics Model BPM50602 was specifically designed to pass 60 to 80 MHz while maintaining low insertion loss and sharp rejection. The basic bandpass filter design can also be adapted to custom applications.

Specifications:	
Passband (MHz)	60 to 80
Passband Insertion Loss:	2.0 dB maximum
Passband VSWR:	1.5:1 maximum
Stopband:	50 dB min from 0 to 40 and 110 to 500 MHz
Operating Power:	2W max

Connectors:

Model #:

BPM50602:	SMA Female – SMA Female
BPM50602-01:	SMA Male – SMA Female
BPM50602-02:	SMA Female – SMA Male
BPM50602-03:	SMA Male – SMA Male