

The wise choice



Micro-Tronics

for all your filter needs


Micro-Tronics is an operating division of O.M. Jones, Inc.

Telephone: 209-532-1008

Facsimile: 209-532-1009

e-mail: sales@micro-tronics.net

-Model BPC50322

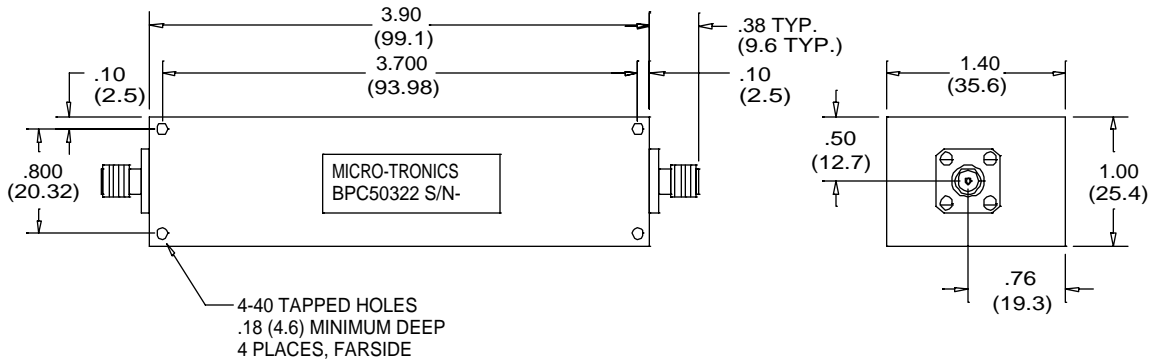

DIMENSIONS IN INCHES (MM)

Micro-Tronics Model BPC50322 was specifically designed to pass 1750 to 1850 MHz while maintaining low insertion loss and sharp rejection. The basic bandpass filter design can also be adapted to custom applications.

Specifications:	
Passband (MHz)	1750 to 1850
Passband Insertion Loss:	0.5 dB maximum
Passband VSWR:	1.25:1 maximum
Stopband:	60 dB minimum from 0 to 1540 and 2050 to 5500 MHz
Operating Power:	2W max

Connectors:

Model #:

BPC50322:	SMA Female – SMA Female
BPC50322-01:	SMA Male – SMA Female
BPC50322-02:	SMA Female – SMA Male
BPC50322-03:	SMA Male – SMA Male