The wise choice



for all your filter needs

## **Micro-Tronics**


Micro-Tronics is an operating division of O.M. Jones, Inc.

Telephone: 209-532-1008

Facsimile: 209-532-1009

e-mail: sales@micro-tronics.net

## -Model BPC50329

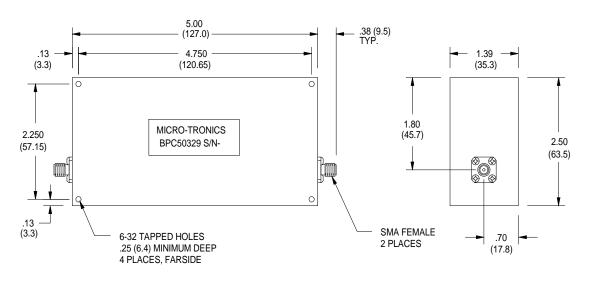

DIMENSIONS IN INCHES (mm)

Micro-Tronics Model BPC50329 was specifically designed to pass 2200 to 2300 MHz while maintaining low insertion loss and sharp rejection. The basic bandpass filter design can also be adapted to custom applications.

Specifications:	
Passband (MHz)	2200 to 2300
Passband Insertion Loss:	0.5 dB maximum
Passband VSWR:	1.5:1 maximum
Stopband:	60 dB min from 0 to 2140 and
	2360 to 5000 MHz
Operating Power:	10W max
Operating Temperature:	-20 to +50° C

## Connectors:

Model #:	
BPC50329:	SMA Female . SMA Female
BPC50329-01:	SMA Male . SMA Female
BPC50329-02:	SMA Female . SMA Male
BPC50329-03:	SMA Male . SMA Male