

The wise choice



Micro-Tronics

for all your filter needs


Micro-Tronics is an operating division of O.M. Jones, Inc.

Telephone: 209-532-1008

Facsimile: 209-532-1009

e-mail: sales@micro-tronics.net

-Model BPM50601

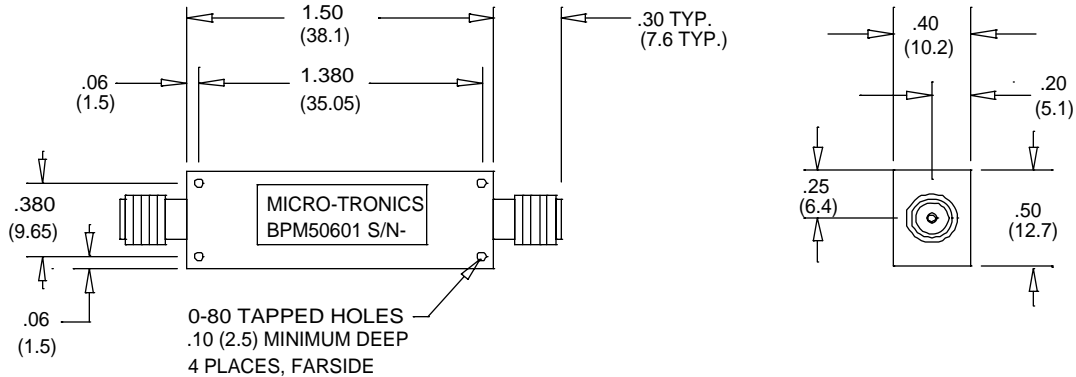

DIMENSIONS IN INCHES (MM)

Micro-Tronics Model BPM50601 was specifically designed to pass 25 to 35 MHz while maintaining low insertion loss and sharp rejection. The basic bandpass filter design can also be adapted to custom applications.

Specifications:	
Passband (MHz)	25 to 35
Passband Insertion Loss:	1.8 dB maximum
Passband VSWR:	1.5:1 maximum
Stopband:	40 dB min from 0 to 10 and 45 to 250 MHz
Operating Power:	2W max

Connectors:

Model #:

BPM50601:	SMA Female – SMA Female
BPM50601-01:	SMA Male – SMA Female
BPM50601-02:	SMA Female – SMA Male
BPM50601-03:	SMA Male – SMA Male