

The wise choice



Micro-Tronics

for all your filter needs


Micro-Tronics is an operating division of O.M. Jones, Inc.

Telephone: 209-532-1008

Facsimile: 209-532-1009

e-mail: sales@micro-tronics.net

-Model BPM50605

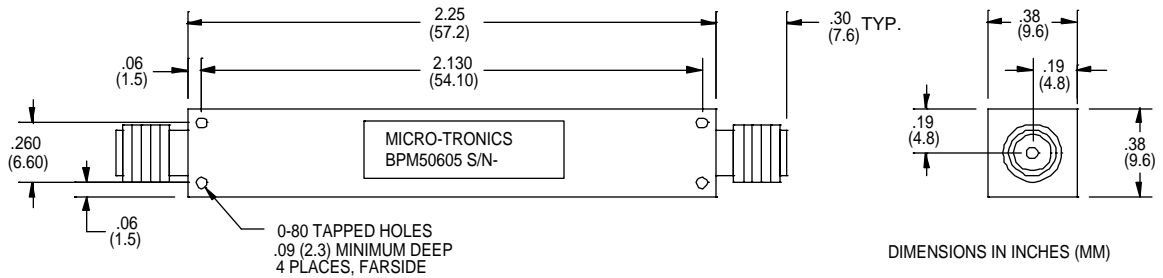

Micro-Tronics Model BPM50605 was specifically designed to pass 950 to 1700 MHz while maintaining low insertion loss and sharp rejection. The basic bandpass filter design can also be adapted to custom applications.

Specifications:	
Passband (MHz)	950 to 1700
Passband Insertion Loss:	1.2 dB maximum
Passband VSWR:	1.5:1 maximum
Stopband:	40 dB min from 0 to 700 and 2000 to 6000 MHz
Operating Power:	2W max

Connectors:

Model #:

BPM50605:	SMA Female – SMA Female
BPM50605-01:	SMA Male – SMA Female
BPM50605-02:	SMA Female – SMA Male
BPM50605-03:	SMA Male – SMA Male