The wise choice




## **Micro-Tronics**

for all your filter needs

Micro-Tronics is an operating division of O.M. Jones, Inc.

Telephone: 209-532-1008 Facsimile: 209-532-1009 e-mail: sales@micro-tronics.net

## -Model BRC50718

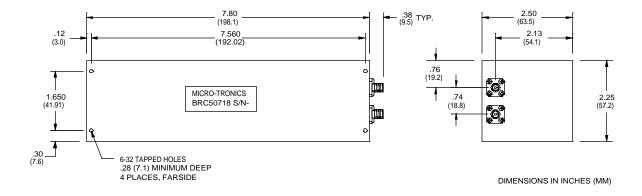

Micro-Tronics Model BRC50718 was specifically designed to reject 880 to 915 MHz (GSM 900, E-GSM) while maintaining low insertion loss and broad upper passband. The basic notch filter design can also be adapted to custom applications.

Specifications:	
Passbands (MHz)	0 to 850 and 940 to 2000
Passband Insertion Loss:	1.5 dB maximum
Passband VSWR:	1.5:1 maximum
Notch Rejection:	-50 dB min from 880 to 915 MHz

## Connectors:

Model #:

BRC50718: SMA Female – SMA Female BRC50718-01: SMA Male – SMA Female BRC50718-02: SMA Female – SMA Male BRC50718-03: SMA Male – SMA Male