The wise choice




Micro-Tronics


for all your filter needs

Micro-Tronics is an operating division of O.M. Jones, Inc.

Telephone: 209-532-1008 Facsimile: 209-532-1009 e-mail: sales@micro-tronics.net

-Model BRC50722

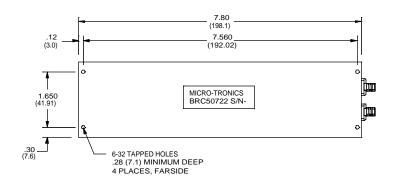



DIMENSIONS IN INCHES (MM)

Micro-Tronics Model BRC50722 was specifically designed to reject 902 to 928 MHz while maintaining low insertion loss and broad upper passband. The basic notch filter design can also be adapted to custom applications.

Specifications:	
Passbands (MHz)	0 to 880 and 950 to 1500
Passband Insertion Loss:	1.5 dB maximum
Passband VSWR:	1.5:1 maximum
Notch Rejection:	-50 dB min from 902 to 928 MHz

Connectors:

Model #:

BRC50722: SMA Female – SMA Female BRC50722-01: SMA Male – SMA Female BRC50722-02: SMA Female – SMA Male BRC50722-03: SMA Male – SMA Male

BRC50722 TYPICAL NARROW BAND RESPONSE



BRC50722 TYPICAL WIDE BAND RESPONSE

