

The wise choice



Micro-Tronics

for all your filter needs


Micro-Tronics is an operating division of O.M. Jones, Inc.

Telephone: 209-532-1008
tronics.net

Facsimile: 209-532-1009

e-mail: sales@micro-

-Model HPM50118

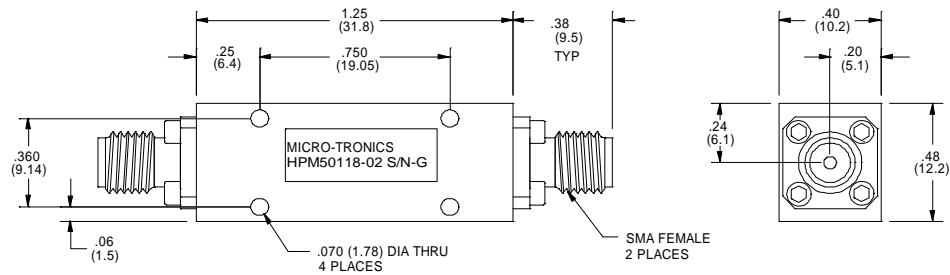

Micro-Tronics Model HPM50118 was specifically designed to reject DC to 3300 MHz while maintaining low insertion loss and a broad upper passband. The basic highpass filter design can also be adapted to custom applications.

| Specifications: | |
|------------------|------------------------------|
| Passband (MHz) | 4000 to 18000 |
| Insertion Loss: | 1.5 dB maximum |
| Passband VSWR: | 2.0:1 maximum |
| Stopband: | 50 dB min from 0 to 3300 MHz |
| Operating Power: | 2W max |

Connectors:

Model #:

| | |
|--------------|-------------------------|
| HPM50118: | SMA Female . SMA Female |
| HPM50118-01: | SMA Male . SMA Female |
| HPM50118-02: | SMA Female . SMA Male |
| HPM50118-03: | SMA Male . SMA Male |