The wise choice



for all your filter needs

Micro-Tronics


Micro-Tronics is an operating division of O.M. Jones, Inc.

Telephone: 209-532-1008

Facsimile: 209-532-1009

e-mail: sales@micro-tronics.net

-Model BPC50302

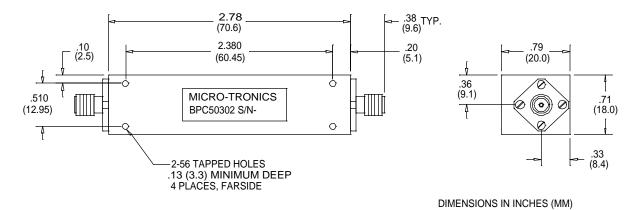

Micro-Tronics Model BPC50302 was specifically designed to pass 3600 to 4200 MHz while maintaining low insertion loss and sharp rejection. The basic bandpass filter design can also be adapted to custom applications.

Specifications:	
Passband (MHz)	3600 to 4200
Passband Insertion Loss:	1.0 dB maximum
Passband VSWR:	1.25:1 maximum
Stopband:	40 dB min from 0 to 3385 and
	4400 to 12000 MHz
Operating Power:	2W max

Connectors:

Model #:

BPC50302:	SMA Female – SMA Female
BPC50302-01:	SMA Male – SMA Female
BPC50302-02:	SMA Female – SMA Male
BPC50302-03:	SMA Male – SMA Male