

The wise choice



Micro-Tronics

for all your filter needs


Micro-Tronics is an operating division of O.M. Jones, Inc.

Telephone: 209-532-1008

Facsimile: 209-532-1009

e-mail: sales@micro-tronics.net

-Model BRC50740

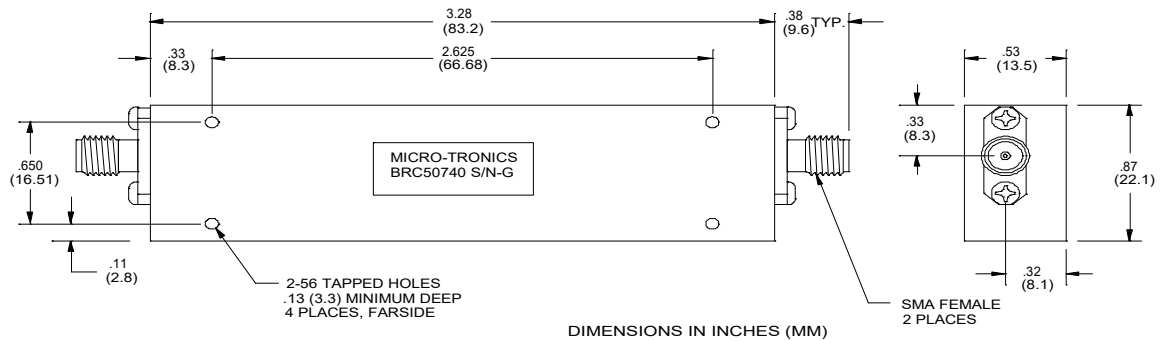

Micro-Tronics Model BRC50740 was specifically designed to reject 5725 to 5850 MHz while maintaining low insertion loss and a broad upper passband. The basic notch filter design can also be adapted to custom applications in the 5000 to 6000 MHz frequency range for similar bandwidths.

Specifications:	
Passbands (MHz)	0 to 5550, 6025 to 11000
Insertion Loss:	2.0 dB maximum
Passband VSWR:	2.0:1 maximum
Stopband:	45 dB min from 5725 to 5850
Operating Power:	2W max

Connectors:

Model #:

BRC50740:	SMA Female – SMA Female
BRC50740-01:	SMA Male – SMA Female
BRC50740-02:	SMA Female – SMA Male
BRC50740-03:	SMA Male – SMA Male