

The wise choice



Micro-Tronics

for all your filter needs


Micro-Tronics is an operating division of O.M. Jones, Inc.

Telephone: 209-532-1008

Facsimile: 209-532-1009

e-mail: sales@micro-tronics.net

-Model BPC50414

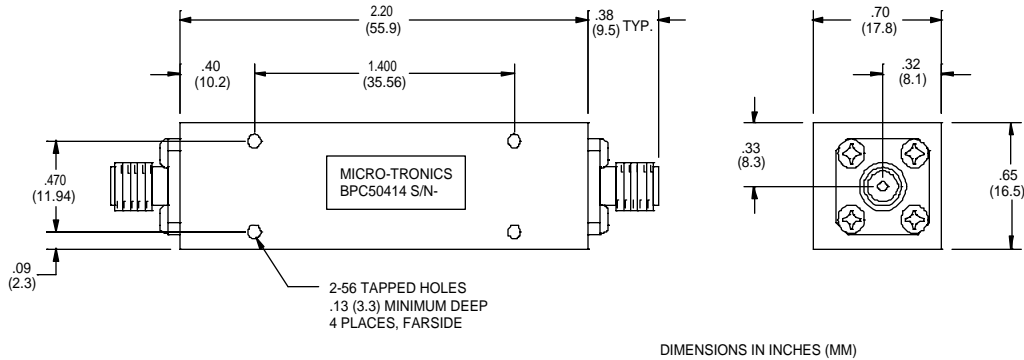

Micro-Tronics Model BPC50414 was specifically designed to pass 4000 to 5000 MHz while maintaining low insertion loss and sharp rejection. The basic bandpass filter design can also be adapted to custom applications.

Specifications:	
Passband (MHz)	4000 to 5000
Passband Insertion Loss:	1.0 dB maximum
Passband VSWR:	1.5:1 maximum
Stopband:	60 dB min from 0 to 3000 and 6000 to 18000 MHz
Operating Power:	2W max

Connectors:

Model #:

BPC50414:	SMA Female – SMA Female
BPC50414-01:	SMA Male – SMA Female
BPC50414-02:	SMA Female – SMA Male
BPC50414-03:	SMA Male – SMA Male