The wise choice



for all your filter needs


## **Micro-Tronics**

Micro-Tronics is an operating division of O.M. Jones, Inc.

Telephone: 209-532-1008 tronics.net Facsimile: 209-532-1009

e-mail: sales@micro-

## -Model HPM50116

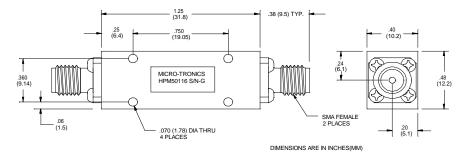

Micro-Tronics Model HPM50116 was specifically designed to reject DC to 2700 MHz while maintaining low insertion loss and a broad upper passband. The basic highpass filter design can also be adapted to custom applications.

Specifications:	
Passband (MHz)	2900 to 18000
Passband Insertion Loss:	2.8 dB maximum
Passband VSWR:	2.0:1 maximum
Stopband:	45 dB min from 0 to 2700
Operating Power:	2W max

Connectors:

Model #:

HPM50116:	SMA Female . SMA Female
HPM50116-01:	SMA Male . SMA Female
HPM50116-02:	SMA Female . SMA Male
HPM50116-03:	SMA Male . SMA Male