


-Model LPS50010-13

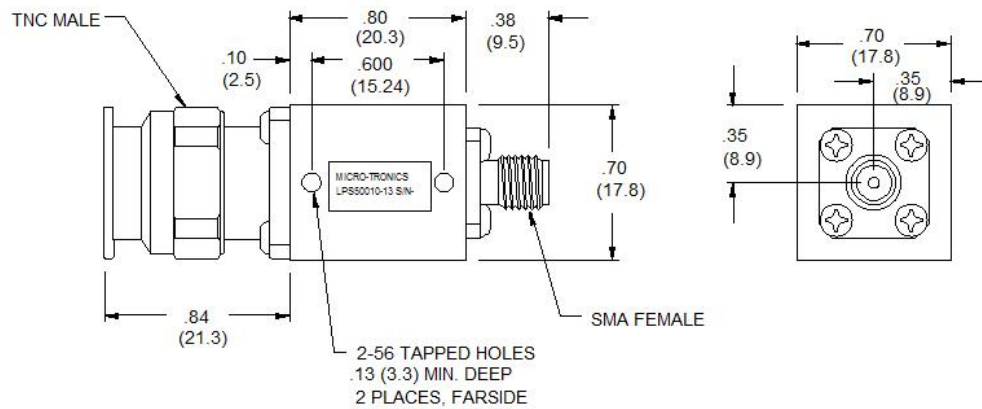

Micro-Tronics Model LPS50010-13 was specifically designed to pass DC to 18 GHz and reject 19.3-20.4 GHz, while maintaining low insertion loss. The basic lowpass filter design can also be adapted to custom applications.

Specifications:	
Passband (MHz)	0 to 18
Passband Insertion Loss:	1.4 dB maximum
Passband VSWR:	1.8:1 maximum
Phase Linearity:	+/-5 deg max from 17.5 to 18 GHz
Passband Phase Matching: (optional)	+/-10 deg maximum
Stopband:	40 dB min from 19.3 to 19.8 GHz
	50 dB min from 19.8 to 20.4 GHz
Operating Power:	7W max (at Passband)