

The wise choice



# Micro-Tronics

for all your filter needs


Micro-Tronics is an operating division of O.M. Jones, Inc.

Telephone: 209-532-1008

Facsimile: 209-532-1009

e-mail: sales@micro-tronics.net

## -Model HPM50115

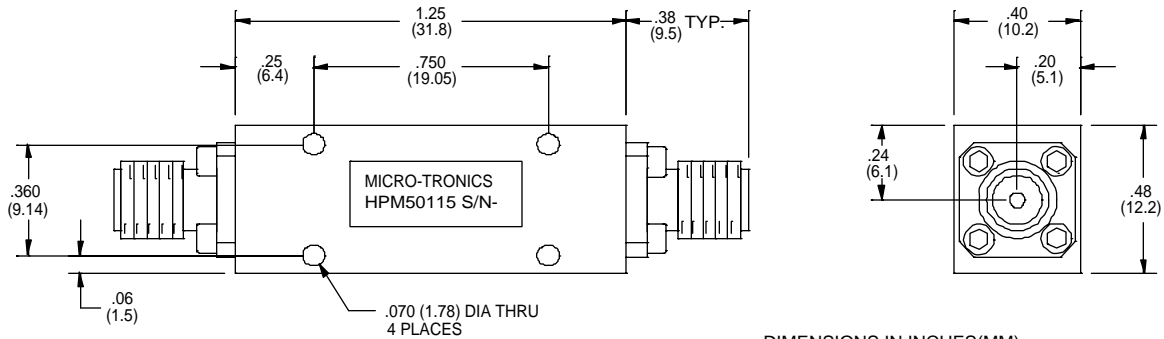

DIMENSIONS IN INCHES(MM)


Micro-Tronics Model HPM50115 was specifically designed to reject DC to 800 MHz while maintaining low insertion loss and a broad upper passband. The basic highpass filter design can also be adapted to custom applications.

Specifications:	
Passband (MHz)	1000 to 18000
Passband Insertion Loss:	2.5 dB maximum
Passband VSWR:	2.0:1 maximum
Stopband:	60 dB min from 0 to 800
Operating Power:	2W max


### Connectors:

#### Model #:

HPM50115:	SMA Female – SMA Female
HPM50115-01:	SMA Male – SMA Female
HPM50115-02:	SMA Female – SMA Male
HPM50115-03:	SMA Male – SMA Male

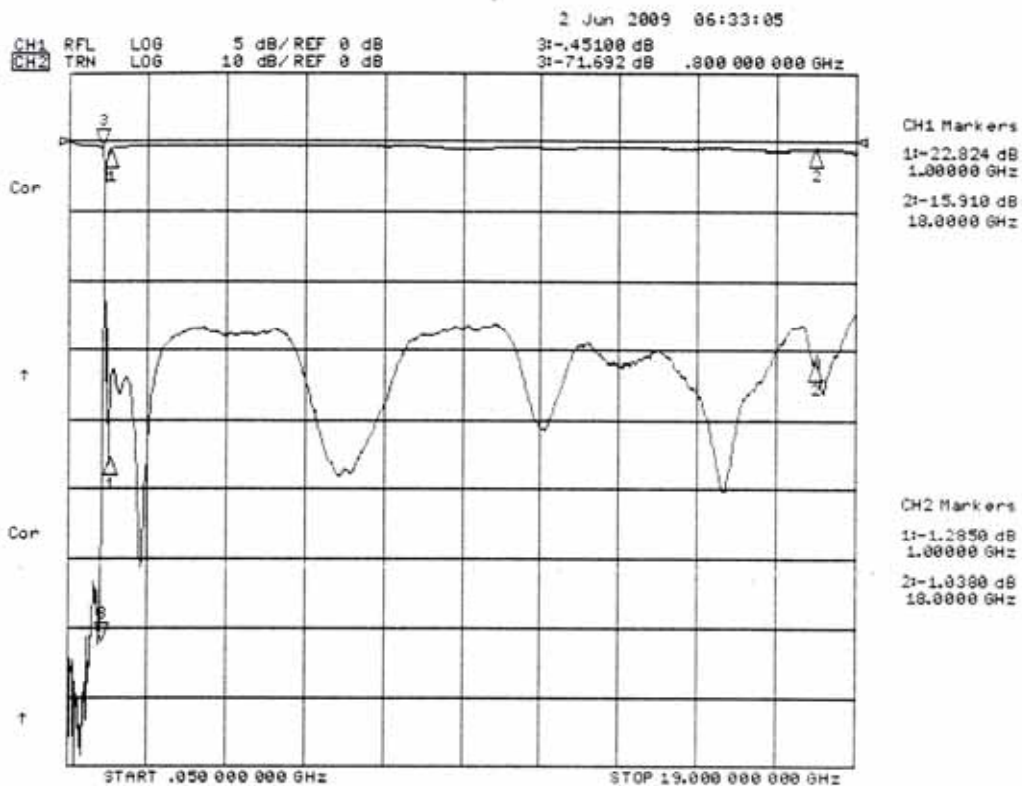

HPM50115  
 Typical Performance Data

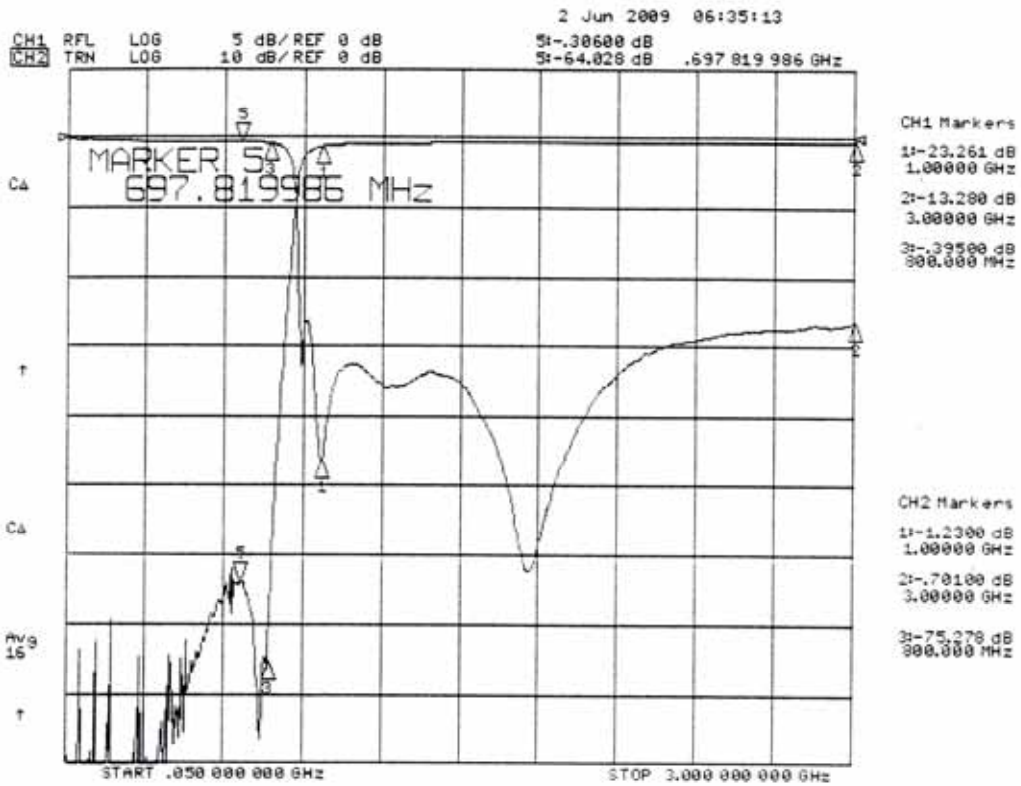

HPM50115  
Typical Performance Data