

The wise choice



# Micro-Tronics

for all your filter needs


Micro-Tronics is an operating division of O.M. Jones, Inc.

Telephone: 209-532-1008

Facsimile: 209-532-1009

e-mail: sales@micro-tronics.net

## -Model BPC50307

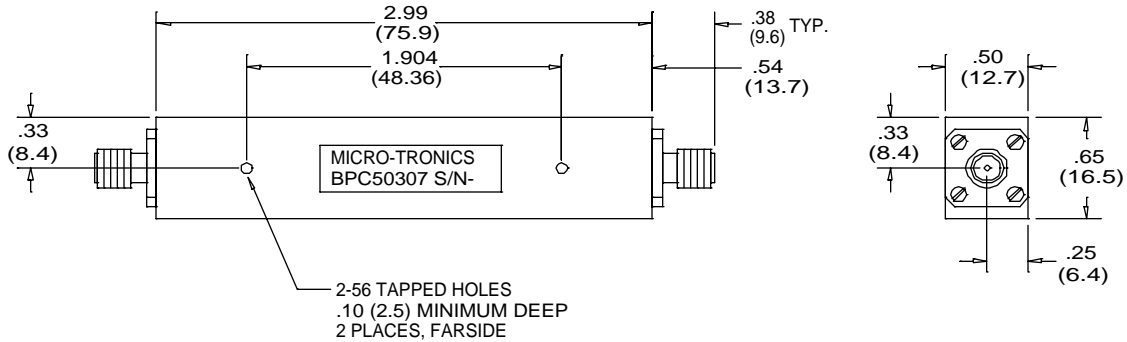

DIMENSIONS IN INCHES (MM)

Micro-Tronics Model BPC50307 was specifically designed to pass 12250 to 12750 MHz while maintaining low insertion loss and sharp rejection. The basic bandpass filter design can also be adapted to custom applications.

Specifications:	
Passband (MHz)	12250 to 12750
Passband Insertion Loss:	1.0 dB maximum
Passband VSWR:	1.25:1 maximum
Stopband:	40 dB min from 0 to 11900 and 14000 to 26500 MHz
Operating Power:	2W max

### Connectors:

#### Model #:

BPC50307:	SMA Female – SMA Female
BPC50307-01:	SMA Male – SMA Female
BPC50307-02:	SMA Female – SMA Male
BPC50307-03:	SMA Male – SMA Male