

The wise choice



Micro-Tronics

for all your filter needs


Micro-Tronics is an operating division of O.M. Jones, Inc.

Telephone: 209-532-1008

Facsimile: 209-532-1009

e-mail: sales@micro-tronics.net

-Model BPC50308

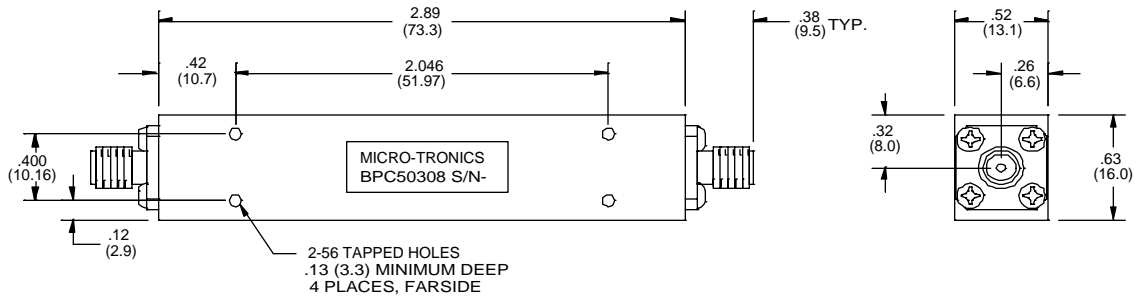

DIMENSIONS IN INCHES (MM)

Micro-Tronics Model BPC50308 was specifically designed to pass 14000 to 14500 MHz while maintaining low insertion loss and sharp rejection. The basic bandpass filter design can also be adapted to custom applications.

Specifications:	
Passband (MHz)	14000 to 14500
Passband Insertion Loss:	1.0 dB maximum
Passband VSWR:	1.30:1 maximum
Stopband:	60 dB min from 0 to 13250 and 15500 to 26500 MHz
Operating Power:	2W max

Connectors:

Model #:

BPC50308:	SMA Female – SMA Female
BPC50308-01:	SMA Male – SMA Female
BPC50308-02:	SMA Female – SMA Male
BPC50308-03:	SMA Male – SMA Male