

The wise choice



Micro-Tronics

for all your filter needs


Micro-Tronics is an operating division of O.M. Jones, Inc.

Telephone: 209-532-1008

Facsimile: 209-532-1009

e-mail: sales@micro-tronics.net

-Model BRC50720

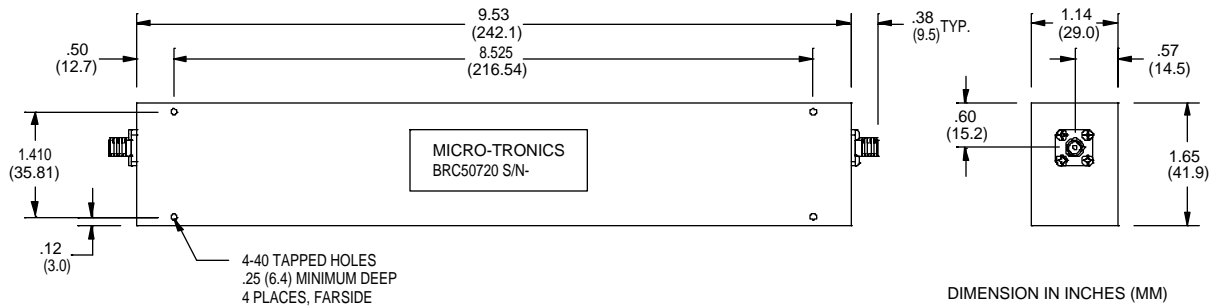

Micro-Tronics Model BRC50720 was specifically designed to reject 1850 to 1910 MHz (PCS 1900) while maintaining low insertion loss and broad upper passband. The basic notch filter design can also be adapted to custom applications.

Specifications:	
Passbands (MHz)	0 to 1800 and 1960 to 3500
Passband Insertion Loss:	1.5 dB maximum
Passband VSWR:	1.5:1 maximum
Notch Rejection:	-50 dB min from 1850 to 1910 MHz

Connectors:

Model #:

BRC50720:	SMA Female – SMA Female
BRC50720-01:	SMA Male – SMA Female
BRC50720-02:	SMA Female – SMA Male
BRC50720-03:	SMA Male – SMA Male