

The wise choice



# Micro-Tronics

for all your filter needs


Micro-Tronics is an operating division of O.M. Jones, Inc.

Telephone: 209-532-1008

Facsimile: 209-532-1009

e-mail: sales@micro-tronics.net

## -Model BRM 50707

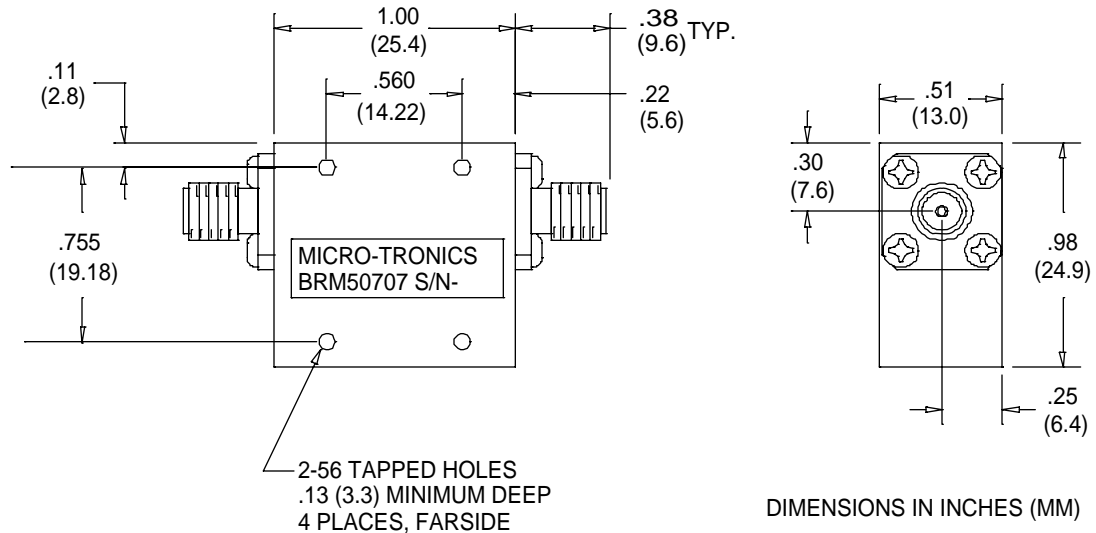

Micro-Tronics Model BRM50707 was specifically designed to reject 1800 to 2000 MHz while maintaining low insertion loss and broad upper passband. The basic notch filter design can also be adapted to custom applications.

Specifications:	
Passbands (MHz)	0 to 1250 and 2600 to 9000
Passband Insertion Loss:	1.5 dB maximum
Passband VSWR:	2.0:1 maximum
Notch Rejection:	50 dB min from 1800 to 2000 MHz
Operating Power:	2W max

### Connectors:

#### Model #:

BRM50707:	SMA Female – SMA Female
BRM50707-01:	SMA Male – SMA Female
BRM50707-02:	SMA Female – SMA Male
BRM50707-03:	SMA Male – SMA Male