

The wise choice



Micro-Tronics

for all your filter needs


Micro-Tronics is an operating division of O.M. Jones, Inc.

Telephone: 209-532-1008

Facsimile: 209-532-1009

e-mail: sales@micro-tronics.net

-Model BRM50715

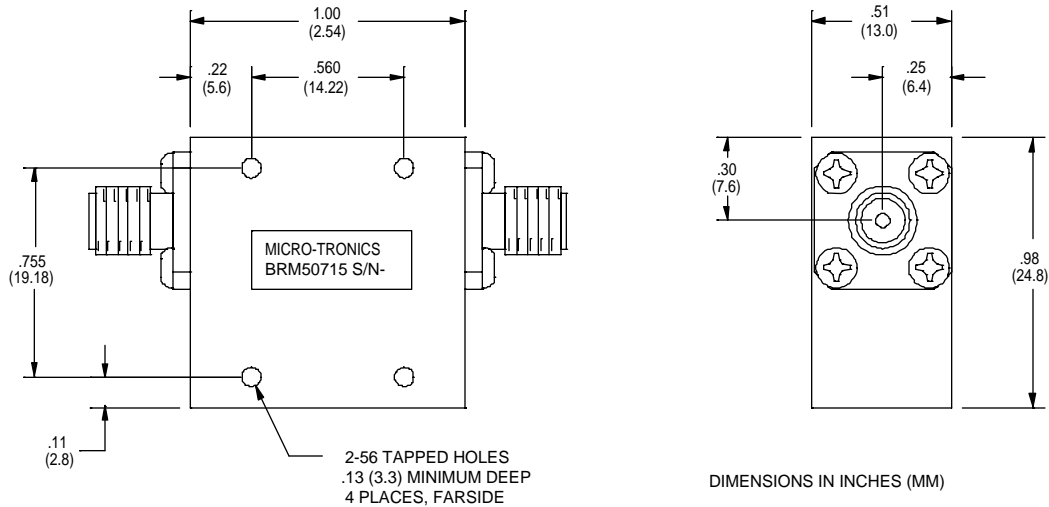

Micro-Tronics Model BRM50715 was specifically designed to reject 1922 to 1978 MHz while maintaining low insertion loss and broad upper passband. The basic notch filter design can also be adapted to custom applications.

Specifications:	
Passbands (MHz)	0 to 1770 and 2130 to 9000
Passband Insertion Loss:	1.5 dB maximum
Passband VSWR:	2.0:1 maximum
Notch Rejection:	30 dB min from 1922 to 1978 MHz
Operating Power:	2W max

Connectors:

Model #:

BRM50715:	SMA Female – SMA Female
BRM50715-01:	SMA Male – SMA Female
BRM50715-02:	SMA Female – SMA Male
BRM50715-03:	SMA Male – SMA Male