

The wise choice



Micro-Tronics

for all your filter needs


Micro-Tronics is an operating division of O.M. Jones, Inc.

Telephone: 209-532-1008

Facsimile: 209-532-1009

e-mail: sales@micro-tronics.net

-Model BRM50723

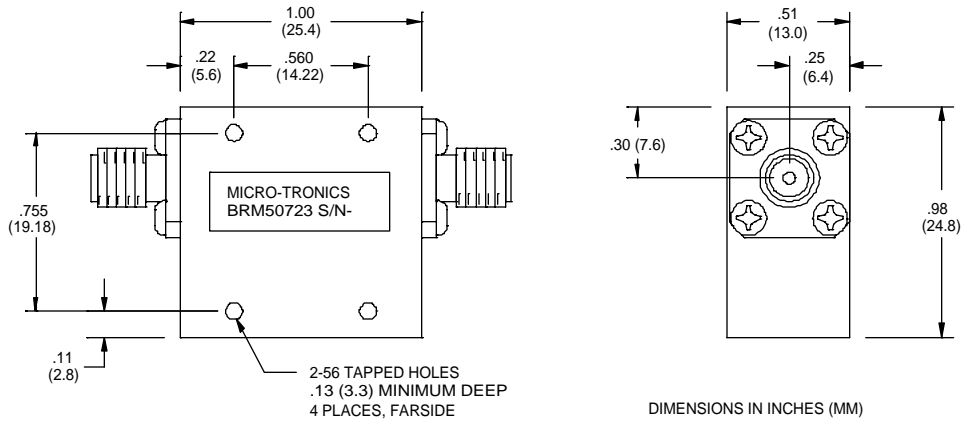

Micro-Tronics Model BRM50723 was specifically designed to reject 2110 to 2170 MHz while maintaining low insertion loss and broad upper passband. The basic notch filter design can also be adapted to custom applications.

Specifications:	
Passbands (MHz)	0 to 2000 and 2400 to 18000
Passband Insertion Loss:	2.0 dB maximum
Passband VSWR:	2.0:1 maximum
Notch Rejection:	40 dB min from 2110 to 2170 MHz
Operating Power:	2W max

Connectors:

Model #:

BRM50723:	SMA Female – SMA Female
BRM50723-01:	SMA Male – SMA Female
BRM50723-02:	SMA Female – SMA Male
BRM50723-03:	SMA Male – SMA Male

