

The wise choice



# Micro-Tronics

for all your filter needs


Micro-Tronics is an operating division of O.M. Jones, Inc.

Telephone: 209-532-1008  
tronics.net

Facsimile: 209-532-1009

e-mail: sales@micro-

## -Model HPM50117

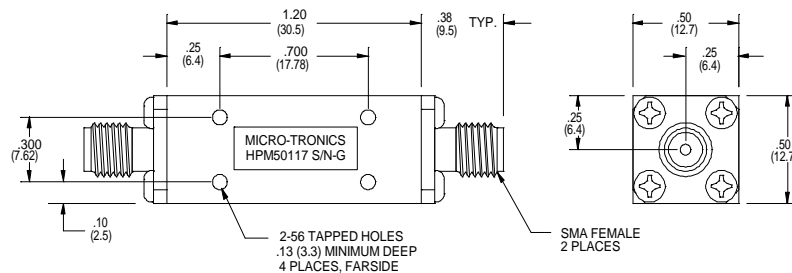

Micro-Tronics Model HPM50117 was specifically designed to reject DC to 2700 MHz while maintaining low insertion loss and a broad upper passband. The basic highpass filter design can also be adapted to custom applications.

Specifications:	
Passband (MHz)	3000 to 18000
Passband Insertion Loss:	2.5 dB maximum
Passband VSWR:	2.0:1 maximum
Stopband:	50 dB min from 0 to 2700
Operating Power:	2W max

Connectors:

Model #:

HPM50117: SMA Female . SMA Female  
HPM50117-01: SMA Male . SMA Female  
HPM50117-02: SMA Female . SMA Male  
HPM50117-03: SMA Male . SMA Male